

RoHS Compliant Product
A suffix of "-C" specifies halogen free

FEATURES


- Trench Barrier Schottky Technology
- Low Forward Voltage Drop
- Low Reverse Current
- High Current Capability
- High Reliability
- High Surge Current Capability
- Epitaxial Construction

MECHANICAL DATA



- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any

ORDER INFORMATION

Part Number	Type
SBL10U100DS1-C	Lead (Pb)-free and Halogen-free



TO-252



REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	6.3	6.9	J	2.3	REF.
B	4.95	5.53	K	0.89	REF.
C	2.1	2.5	M	0.45	1.14
D	0.4	0.9	N	1.55	Typ.
E	6	7.7	O	0	0.15
F	2.90	REF.	P	0.58	REF.
G	5.4	6.4			
H	0.6	1.2			

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)

Parameter	Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	100	V
Working Peak Reverse Voltage	V_{RSM}	100	V
Maximum DC Blocking Voltage	V_{DC}	100	V
Maximum Average Forward Rectified Current	I_F	10	A
Peak Forward Surge Current @8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	150	A
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V/ μ s
Typical Thermal Resistance from Junction-Case ³	$R_{\theta JC}$	6	°C/W
Operating Junction & Storage Temperature Range	T_J, T_{STG}	-40~150	°C

ELECTRICAL CHARACTERISTICS


Parameter	Symbol	Typ.	Max.	Unit	Test Condition
Maximum Instantaneous Forward Voltage	V_F	0.48	0.52	V	$I_F=3A, T_J=25^\circ C$
		0.54	0.58		$I_F=5A, T_J=25^\circ C$
		0.69	0.72		$I_F=10A, T_J=25^\circ C$
		0.63	-		$I_F=10A, T_J=125^\circ C$
Maximum DC Reverse Current at Rated DC Blocking Voltage ²	I_R	-	0.1	mA	$T_J=25^\circ C$
		-	10		$T_J=100^\circ C$
Typical Junction Capacitance ¹	C_J	470	-	pF	

Notes:


1. Measured at 1MHz and applied reverse voltage of 5V D.C.
2. Pulse Test: Pulse width=300 μ s, duty cycle \leq 2%.
3. Surface mounted on 2.5cm x 2.5cm x 0.5mm copper pad area.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

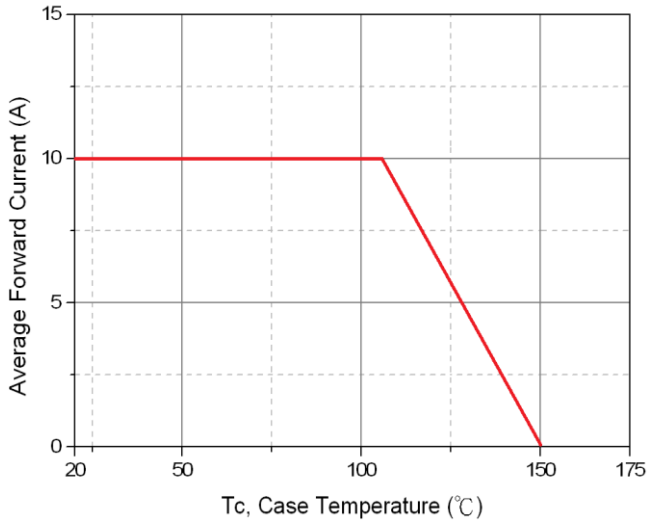


Typical Forward Characteristic

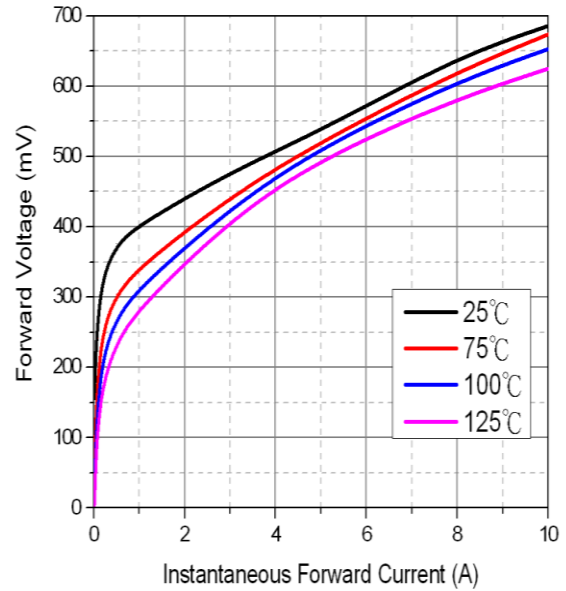


Typical Junction Capacitance (pF)

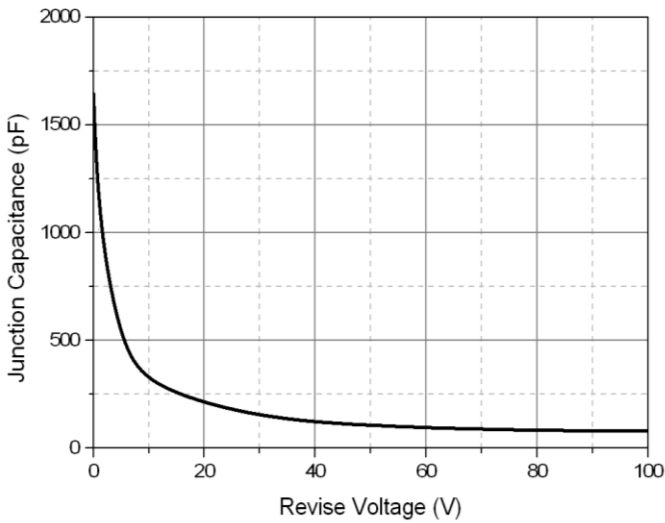

Typical Reverse Characteristic

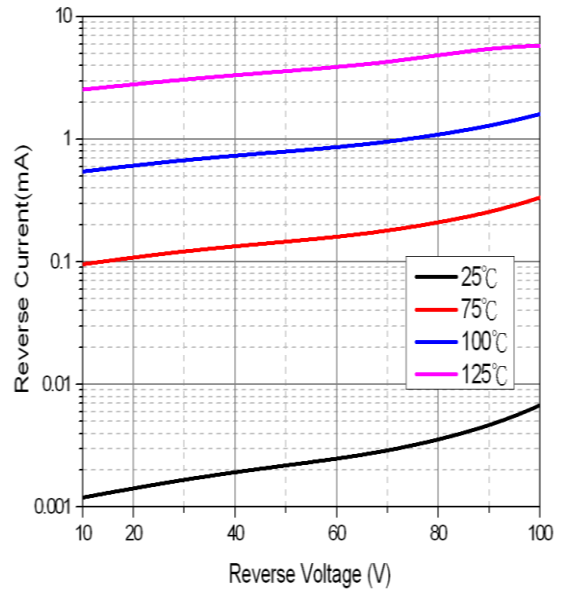

Maximum Non-Repetitive Forward Surge Current

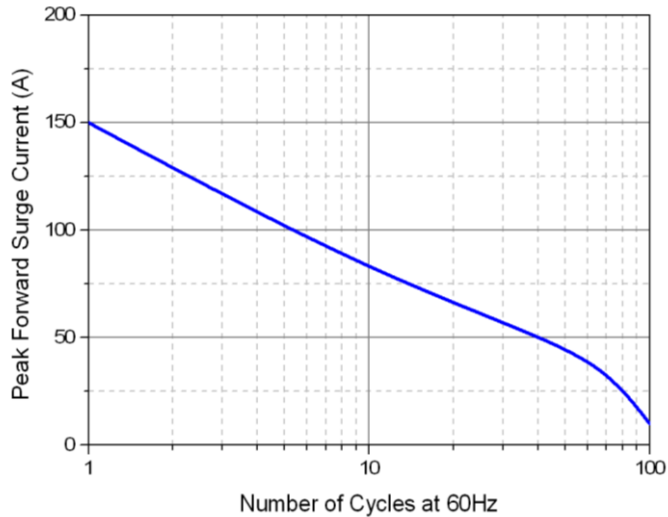

Mounting Pad Layout

