


RoHS Compliant Product
A suffix of "-C" specifies halogen free

DESCRIPTION

The SSE113N15SV-C is the Shielded Gate Technology N-ch MOSFETs with extreme high cell density, which provide excellent $R_{DS(ON)}$ and gate charge for most of the synchronous buck converter applications.

The SSE113N15SV-C meet the RoHS and Green Product requirement with full function reliability approved.

TO-220



FEATURES


- Shielded Gate Trench Technology
- Super Low Gate Charge
- Green Device Available

MARKING



ORDER INFORMATION

Part Number	Type
SSE113N15SV-C	Lead (Pb)-free and Halogen-free



ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V_{DS}	150	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ¹ (Silicon Limited)	I_D	$T_C=25^\circ\text{C}$	113
		$T_C=100^\circ\text{C}$	80
Pulsed Drain Current ²	I_{DM}	430	A
Total Power Dissipation	P_D	$T_C=25^\circ\text{C}$	273
Operating Junction & Storage Temperature Range	T_J, T_{STG}	-55~175	$^\circ\text{C}$
Thermal Resistance Ratings			
Maximum Thermal Resistance Junction-Ambient ¹	$R_{\theta JA}$	60	$^\circ\text{C/W}$
Maximum Thermal Resistance Junction-Case ¹	$R_{\theta JC}$	0.55	

ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test conditions	
Drain-Source Breakdown Voltage	BV_{DSS}	150	-	-	V	$V_{GS}=0V, I_D=250\mu A$	
Gate Threshold Voltage	$V_{GS(th)}$	2	-	4	V	$V_{DS}=V_{GS}, I_D=250\mu A$	
Forward Transfer Conductance ²	g_{fs}	-	70	-	S	$V_{DS}=5V, I_D=20A$	
Gate-Source Leakage Current	I_{GSS}	-	-	± 100	nA	$V_{GS}=\pm 20V, V_{DS}=0$	
Drain-Source Leakage Current	I_{DSS}	$T_J=25^\circ\text{C}$	-	-	1	μA	$V_{DS}=120V, V_{GS}=0$
		$T_J=100^\circ\text{C}$	-	-	100		
Static Drain-Source On-Resistance ³	$R_{DS(ON)}$	-	7.9	8.8	m Ω	$V_{GS}=10V, I_D=20A$	
Gate Resistance	R_g	-	0.95	-	Ω	$f=1\text{MHz}$	
Total Gate Charge	Q_g	-	52	-	nC	$I_D=20A$ $V_{DD}=75V$ $V_{GS}=10V$	
Gate-Source Charge	Q_{gs}	-	19	-			
Gate-Drain ("Miller") Charge	Q_{gd}	-	5	-			
Turn-on Delay Time	$T_{d(on)}$	-	19	-	nS	$V_{DD}=75V$ $I_D=20A$ $V_{GS}=10V$ $R_G=10\Omega$	
Rise Time	T_r	-	10	-			
Turn-off Delay Time	$T_{d(off)}$	-	29	-			
Fall Time	T_f	-	12	-			
Input Capacitance	C_{iss}	-	4362	-	pF	$V_{GS}=0V$ $V_{DS}=75V$ $f=1\text{MHz}$	
Output Capacitance	C_{oss}	-	333	-			
Reverse Transfer Capacitance	C_{rss}	-	11.5	-			
Source-Drain Diode							
Diode Forward Voltage ³	V_{SD}	-	0.9	1.2	V	$I_F=20A, V_{GS}=0V$	
Reverse Recovery Time	t_{rr}	-	80	-	nS	$I_F=20A, V_R=75V,$ $di/dt=100A/\mu s$	
Reverse Recovery Charge	Q_{rr}	-	140	-	nC		

Notes:

1. The data tested by surface mounted on a 1 inch² FR-4 board with 2oz copper.
2. The Pulse width limited by maximum junction temperature, Pulse Width $\leq 10\mu s$, Duty Cycle $\leq 2\%$.
3. The Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.

TYPICAL CHARACTERISTICS CURVE

Fig 1. Typical Output Characteristics

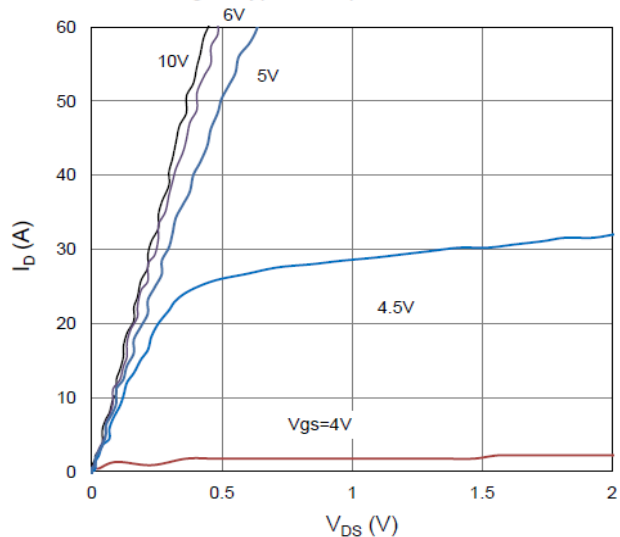


Figure 2. On-Resistance vs. Gate-Source Voltage

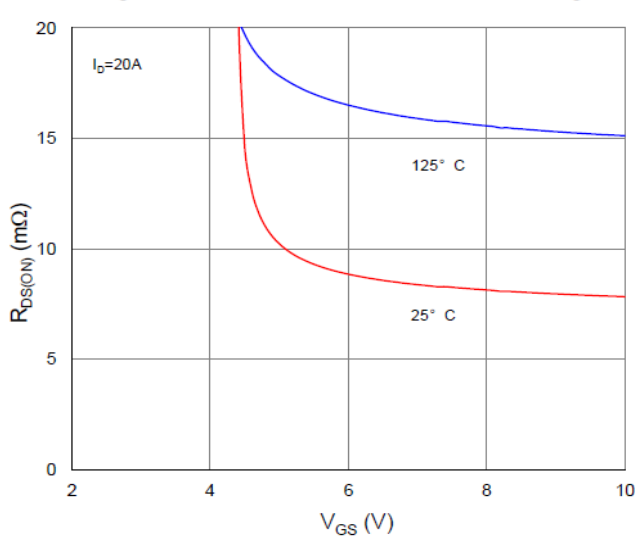


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

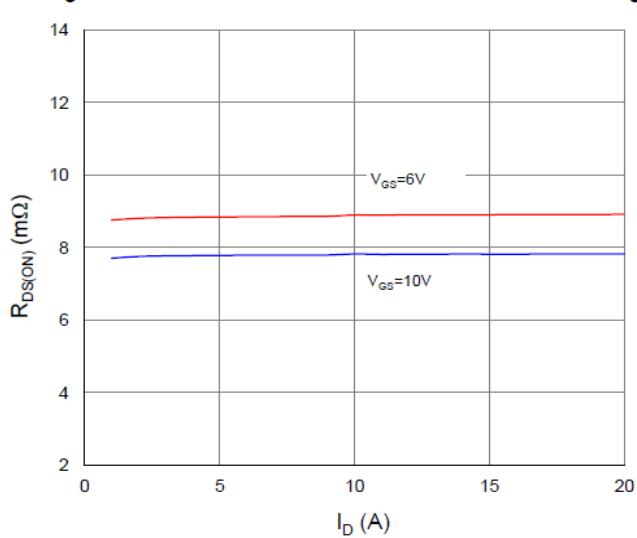


Figure 4. Normalized On-Resistance vs. Junction Temperature

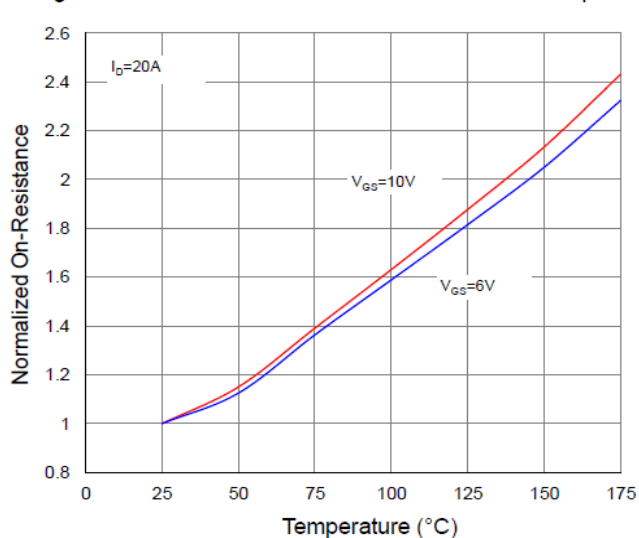


Figure 5. Typical Transfer Characteristics


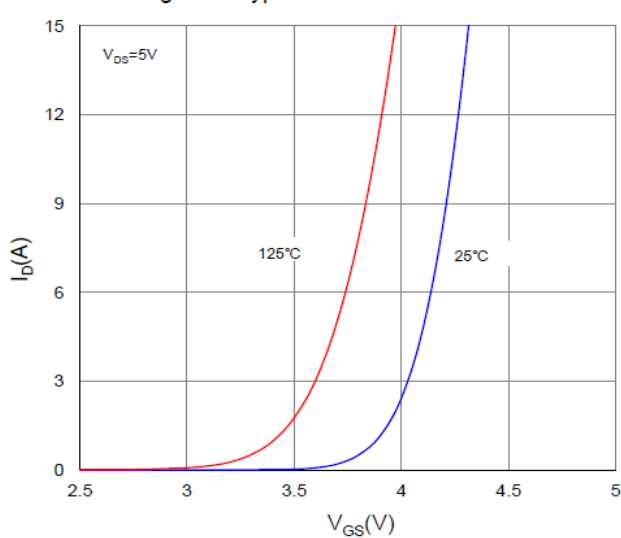


Figure 6. Typical Source-Drain Diode Forward Voltage

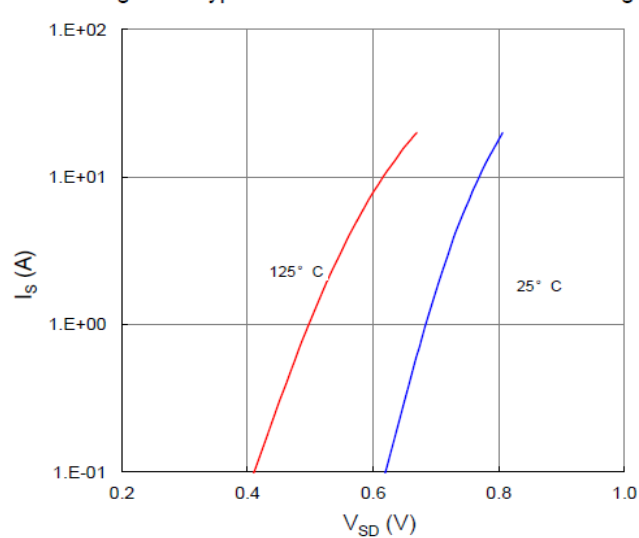

TYPICAL CHARACTERISTICS CURVE

Figure 7. Typical Gate-Charge vs. Gate-to-Source Voltage

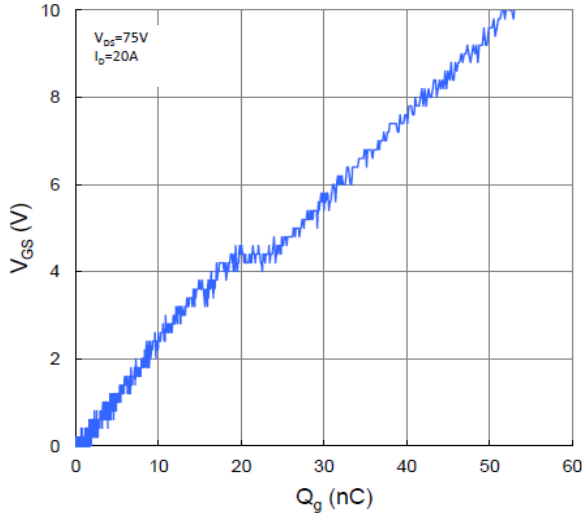


Figure 8. Typical Capacitance vs. Drain-to-Source Voltage

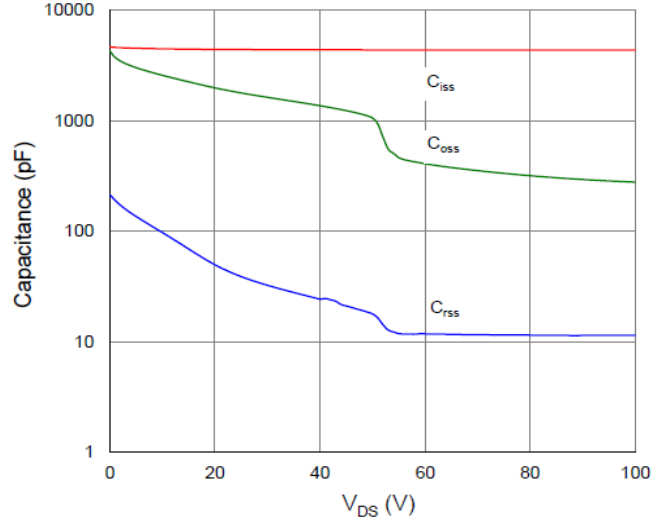


Figure 9. Maximum Safe Operating Area

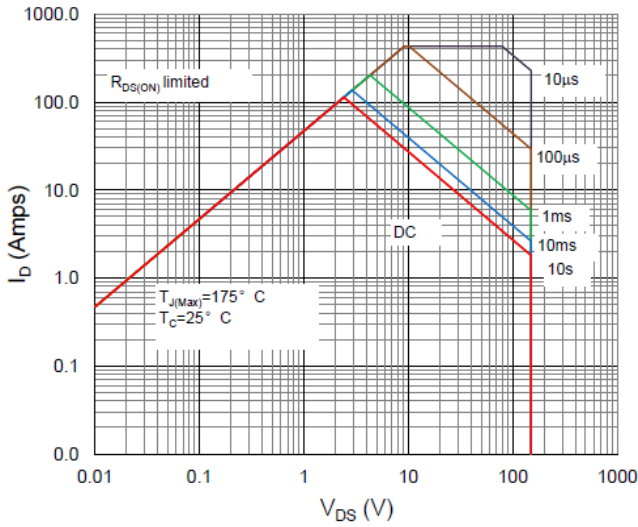


Figure 10. Maximum Drain Current vs. Case Temperature



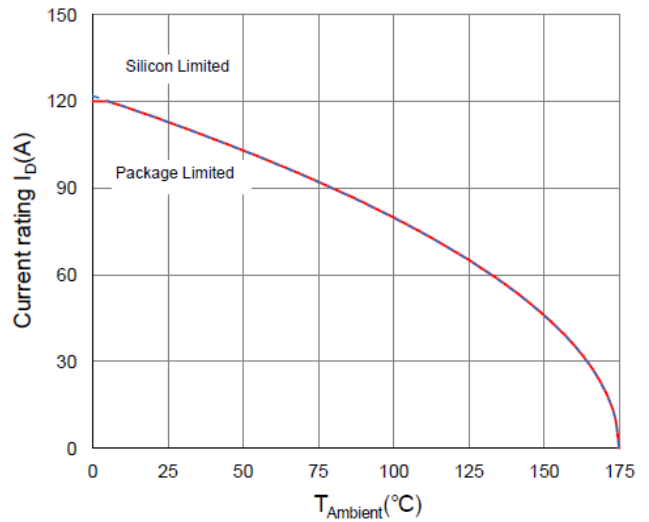


Figure 11. Normalized Maximum Transient Thermal Impedance, Junction-to-Ambient

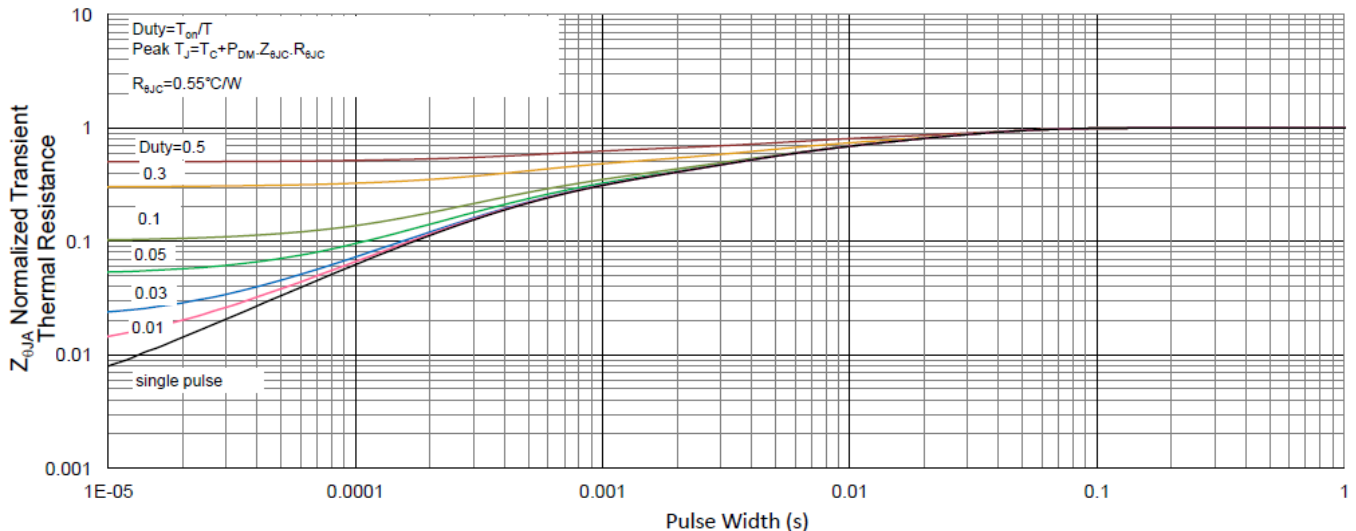

PACKAGE OUTLINE DIMENSIONS

TO-220

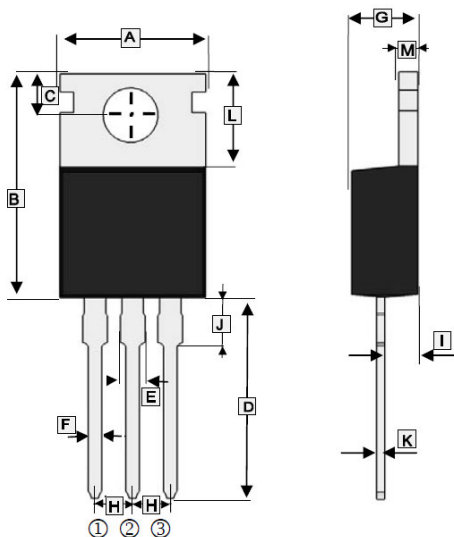

REF.	Millimeter	
	Min.	Max.
A	9.70	10.60
B	14.22	16.50
C	2.54	3.40
D	12.70	14.70
E	1.17	1.78
F	0.40	1.00
G	3.60	4.82
H	2.54 TYP.	
I	2.03	2.92
J	2.70	4.00
K	0.33	0.65
L	5.50	7.00
M	1.15	1.40