

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free



FEATURES

- High DC Current Gain
- Low Frequency Amplifier

CLASSIFICATION OF h_{FE}

Product-Rank	2SA844-C	2SA844-D	2SA844-E
Range	160~320	250~500	400~800

TO-92

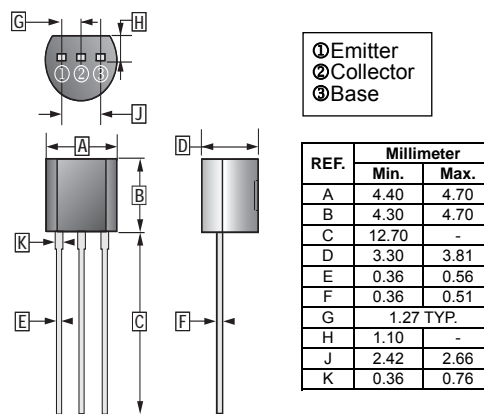

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-55	V
Collector to Emitter Voltage	V_{CEO}	-55	V
Emitter to Base Voltage	V_{EBO}	-5	V
Collector Current - Continuous	I_C	-100	mA
Collector Power Dissipation	P_C	300	mW
Thermal Resistance From Junction to Ambient	$R_{\theta JA}$	416	$^\circ\text{C} / \text{W}$
Junction, Storage Temperature	T_J, T_{STG}	150, -55~150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test condition
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	-55	-	-	V	$I_C = -0.01\text{mA}, I_E = 0$
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	-55	-	-	V	$I_C = -1\text{mA}, I_B = 0$
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	-5	-	-	V	$I_E = -0.01\text{mA}, I_C = 0$
Collector Cut-Off Current	I_{CBO}	-	-	-0.1	μA	$V_{CB} = -18\text{V}, I_E = 0$
Emitter Cut-Off Current	I_{EBO}	-	-	-0.05	μA	$V_{EB} = -2\text{V}, I_C = 0$
DC Current Gain	h_{FE}	160	-	800		$V_{CE} = -12\text{V}, I_C = -2\text{mA}$
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	-	-	-0.5	V	$I_C = -10\text{mA}, I_B = -1\text{mA}$
Base to Emitter Voltage	V_{BE}	-	-	-0.75	V	$V_{CE} = -12\text{V}, I_C = -2\text{mA}$
Transition Frequency	f_T	-	200	-	MHz	$V_{CE} = -12\text{V}, I_C = -2\text{mA}$
Collector Output Capacitance	C_{ob}	-	2	-	pF	$V_{CE} = -10\text{V}, I_C = 0, f = 1\text{MHz}$