


RoHS Compliant Product  
A suffix of "-C" specifies halogen & lead-free

### FEATURES

- General Purpose Amplifier

### TO-92

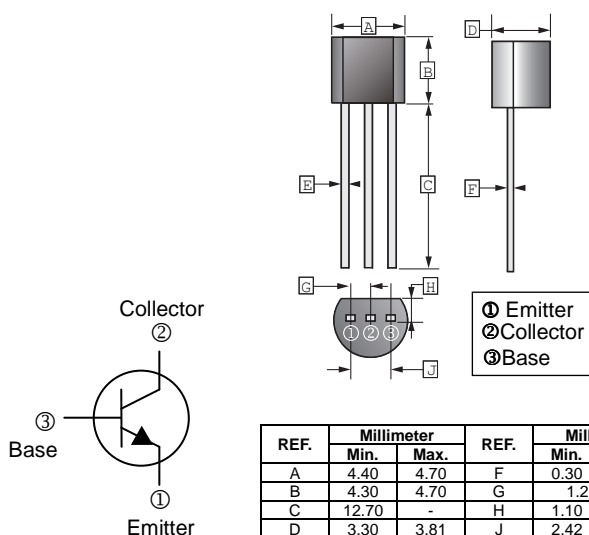

### ABSOLUTE MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	$V_{CBO}$	60	V
Collector to Emitter Voltage	$V_{CEO}$	60	V
Emitter to Base Voltage	$V_{EBO}$	4	V
Collector Current - Continuous	$I_C$	0.5	A
Collector Power Dissipation	$P_C$	625	mW
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	200	$^\circ\text{C}/\text{W}$
Junction, Storage Temperature	$T_J, T_{STG}$	150, -55~150	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	60	-	-	V	$I_C=100\mu\text{A}, I_E=0$
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	60	-	-	V	$I_C=1\text{mA}, I_B=0$
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	4	-	-	V	$I_E=100\mu\text{A}, I_C=0$
Collector Cut-Off Current	$I_{CBO}$	-	-	0.1	$\mu\text{A}$	$V_{CB}=60\text{V}, I_E=0$
Collector Cut-Off Current	$I_{CEO}$	-	-	0.1	$\mu\text{A}$	$V_{CE}=60\text{V}, I_B=0$
Emitter Cut-Off Current	$I_{EBO}$	-	-	1	$\mu\text{A}$	$V_{EB}=3\text{V}, I_C=0$
DC Current Gain	$h_{FE(1)}$	100	-	-		$V_{CE}=1\text{V}, I_C=100\text{mA}$
	$h_{FE(2)}$	100	-	-		$V_{CE}=1\text{V}, I_C=10\text{mA}$
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	-	-	0.25	V	$I_C=100\text{mA}, I_B=10\text{mA}$
Base to Emitter Voltage	$V_{BE(sat)}$	-	-	1.2	V	$I_C=100\text{mA}, V_{CE}=1\text{V}$
Transition Frequency	$f_T$	100	-	-	MHz	$V_{CE}=2\text{V}, I_C=10\text{mA}, f=100\text{MHz}$