

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free


FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction
- High operating temperature

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- Polarity: Color band denotes cathode end
- Mounting position: Any

DO-27

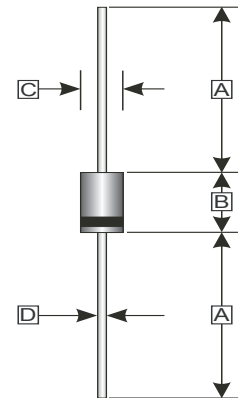

REF.	Millimeter	
	Min.	Max.
A	25.4 (TYP)	
B	7.20	9.53
C	5.00	5.60
D	1.20	1.32

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)

Parameter	Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	200	V
Working Peak Reverse Voltage	V_{RSM}	200	V
Maximum DC Blocking Voltage	V_{DC}	200	V
Maximum Average Forward Rectified Current	I_F	3	A
Peak Forward Surge Current, 8.3 ms single half sine-wave	I_{FSM}	80	A
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V / μs
Typical Thermal Resistance	$R_{\theta JC}$	15	°C /W
Operating and Storage Temperature Range	T_J, T_{STG}	175, -50~175	°C

ELECTRICAL CHARACTERISTICS


Parameter	Symbol	Typ.	Max.	Unit	Test Condition
Instantaneous Forward Voltage	V_F	0.83	0.9	V	$I_F = 3A, T_J = 25^\circ C$
		0.68	-		$I_F = 3A, T_J = 125^\circ C$
Maximum DC Reverse Current at Rated DC Blocking Voltage ²	I_R	0.06	50	μA	$T_J = 25^\circ C$
		45	800		$T_J = 125^\circ C$
Typical Junction Capacitance ¹	C_J	40	-	μF	

NOTES:


1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Pulse Test : Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

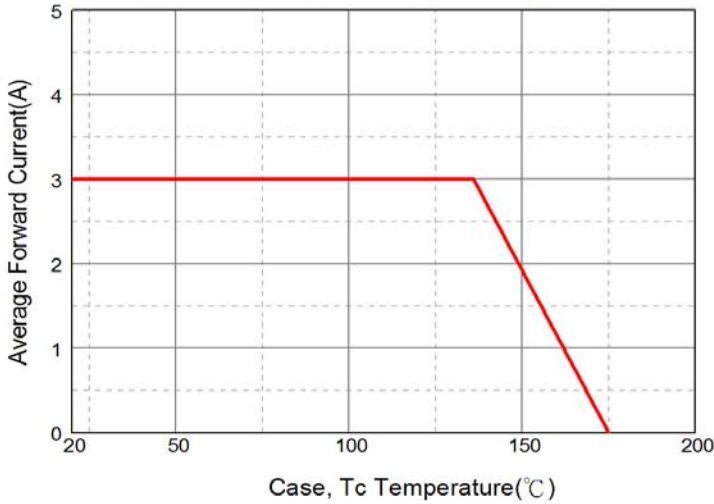


Typical Forward Characteristic

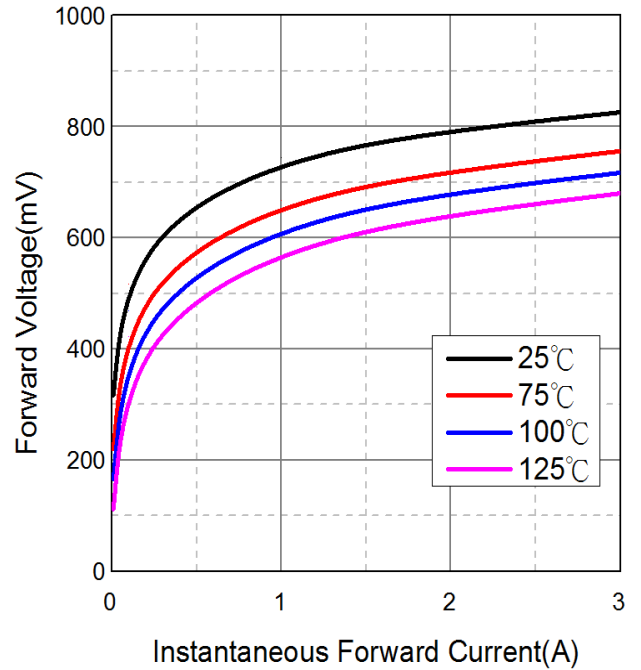

Maximum Non-Repetitive Forward Surge Current

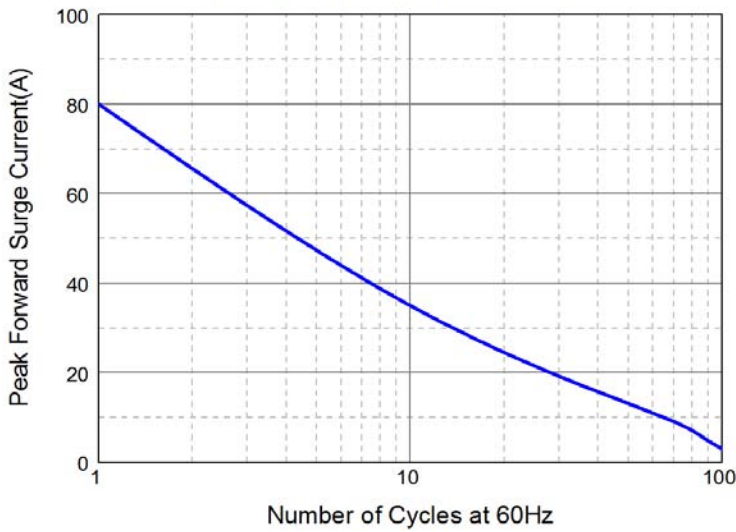

Typical Reverse Characteristic

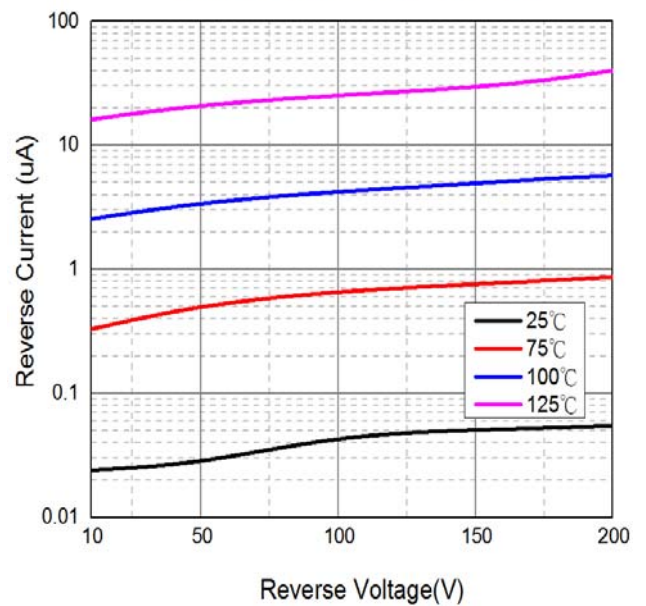

Typical Junction Capacitance

