

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES

- Plastic package has underwriters laboratory Flammability classification 94V-0
Flame retardant epoxy molding compound
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- High current capability
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications

MECHANICAL DATA

- Case: TO-252(D-Pack) Molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: As Marked
- Mounting position: Any


PACKAGE INFORMATION

Package	MPQ	Leader Size
TO-252	2.5K	13' inch


ORDER INFORMATION

Part Number	Type
MBR30150D1	Lead (Pb)-free
MBR30150D1-C	Lead (Pb)-free and Halogen-free

TO-252(D-PACK)

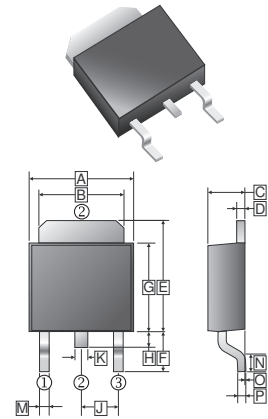

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	6.3	6.9	J	2.3	REF.
B	4.95	5.53	K	0.89	REF.
C	2.1	2.5	M	0.45	1.14
D	0.4	0.9	N	1.55	Typ.
E	6	7.7	O	0	0.15
F	2.90	REF.	P	0.58	REF.
G	5.4	6.4			
H	0.6	1.2			



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load. For capacitive load, de-rate current by 20%.)

Parameter		Symbol	Ratings	Unit
Maximum Recurrent Peak Reverse Voltage		V_{RRM}	150	V
Maximum RMS Voltage		V_{RMS}	105	
Maximum DC Blocking Voltage		V_{DC}	150	
Maximum Average Forward Current	Per Leg	$I_{F(AV)}$	15	A
	Per Decive		30	
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load(JEDEC method)		I_{FSM}	100	A
Maximum Forward Voltage @15A		V_F	0.98	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_J=25^{\circ}C$	I_R	0.05	mA
	$T_J=125^{\circ}C$		20	
Typical Thermal Resistance		$R_{\theta JC}$	6	°C/W
Operating & Storage Temperature		T_J, T_{STG}	150, -55~150	°C

RATINGS AND CHARACTERISTIC CURVES

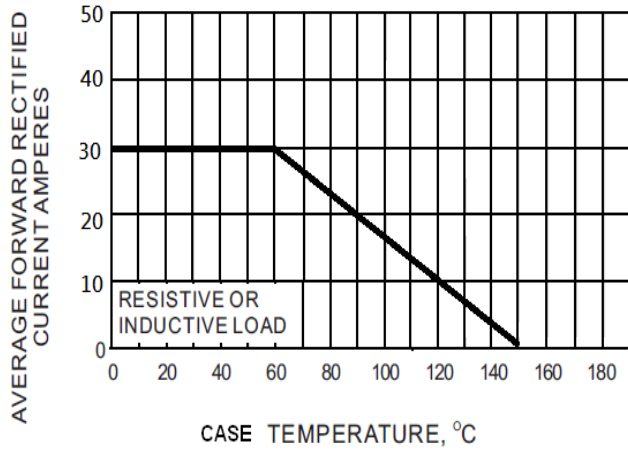


Fig.1- FORWARD CURRENT DERATING CURVE

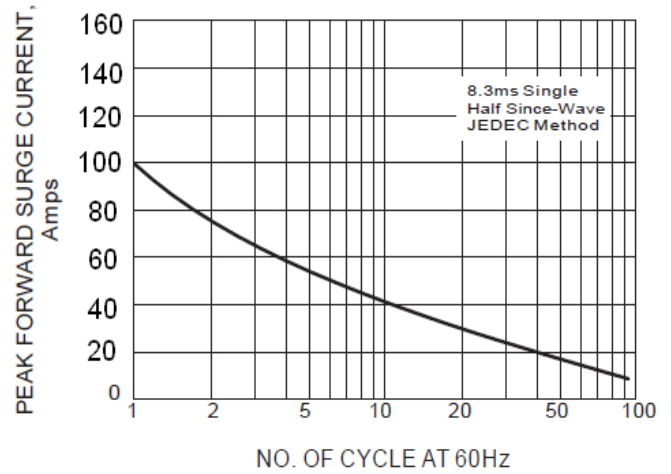


Fig.2- MAXIMUM NON - REPETITIVE SURGE CURRENT

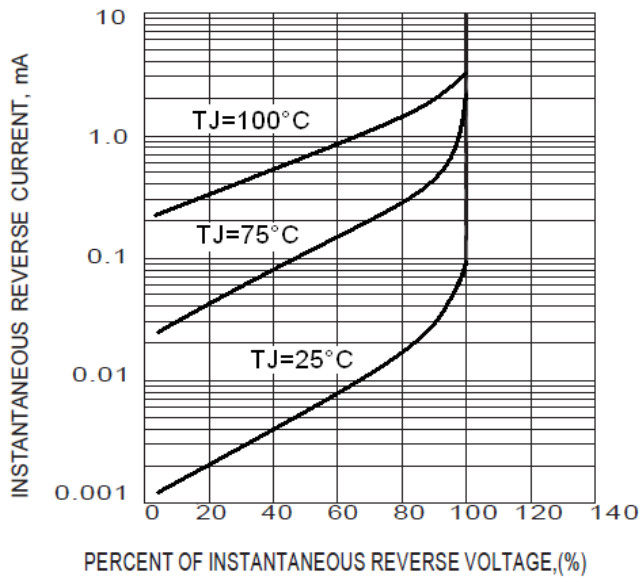


Fig.3- TYPICAL REVERSE CHARACTERISTICS

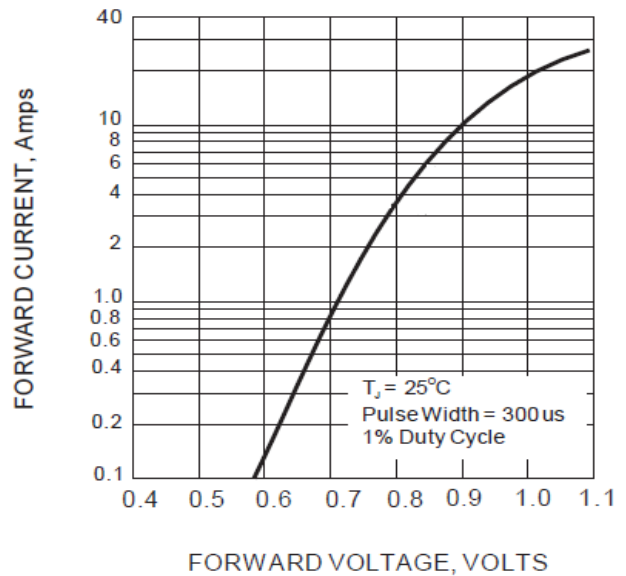


Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS