

K2RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free




FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208
- Polarity: As Marked
- Mounting position: Any
- Weight: 0.7 grams

TO-252 (D-Pack)



REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	6.35	6.90	J	2.30	REF.
B	4.95	5.50	K	0.64	1.14
C	2.10	2.50	M	0.50	1.14
D	0.43	0.9	N	1.3	1.8
E	6.0	7.5	O	0	0.13
F	2.80	REF.	P	0.58	REF.
G	5.40	6.40			
H	0.60	1.20			

PACKAGE INFORMATION

Package	MPQ	Leader Size
TO-252	2.5K	13 inch

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)


Parameter	Symbol	Rating	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	150	V
Maximum RMS Voltage	V_{RMS}	105	V
Maximum DC Blocking Voltage	V_{DC}	15	V
Maximum Average Forward Rectified Current	I_F	5	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	120	A
Maximum Instantaneous Forward Voltage @ 5A	V_F	0.87	V
Maximum DC Reverse Current at Rated DC Blocking Voltage ³	$T_A=25^\circ\text{C}$	0.2	mA
	$T_A=100^\circ\text{C}$	2	
Typical Junction Capacitance ¹	C_J	250	pF
Voltage Rate Of Change (Rated V_R)	dv / dt	10000	V / μs
Typical Thermal Resistance ²	$R_{\theta Jc}$	10	$^\circ\text{C}/\text{W}$
Operating & Storage Temperature	T_J, T_{STG}	-55~150	$^\circ\text{C}$

NOTES:


1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. FR4 Board Heat sink size: 10*10*0.2mm.
3. Pulse test: 300uS pulse width, 1% duty cycle.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

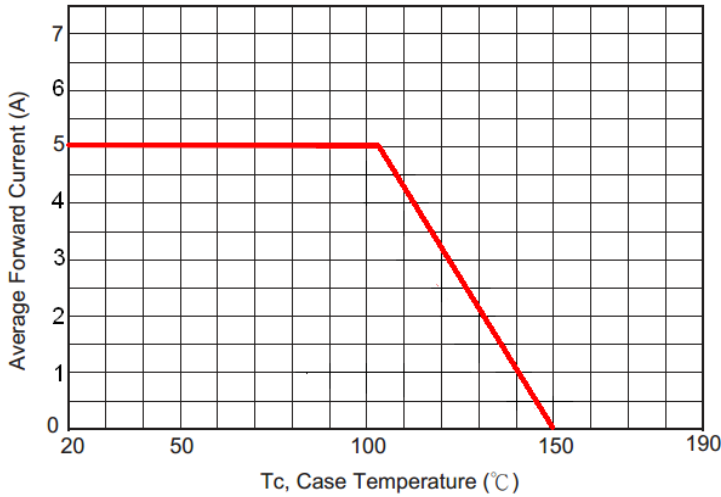


Typical Forward Characteristic

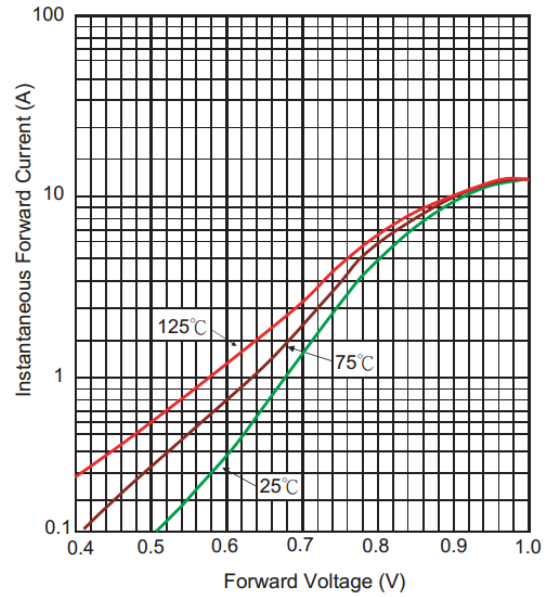

Typical Junction Capacitance

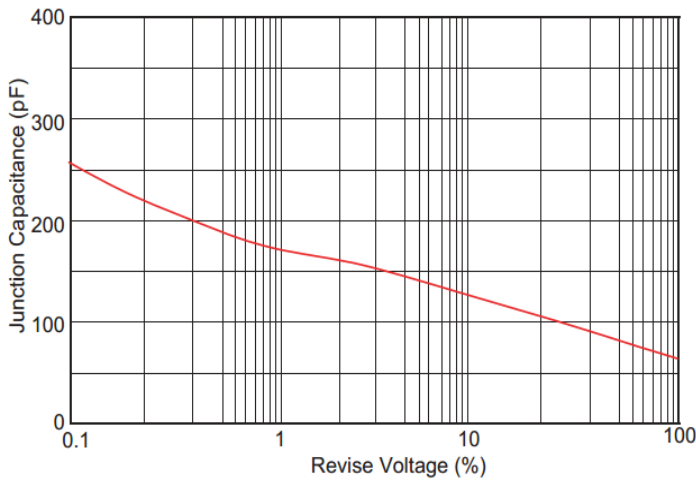

Typical Reverse Characteristic

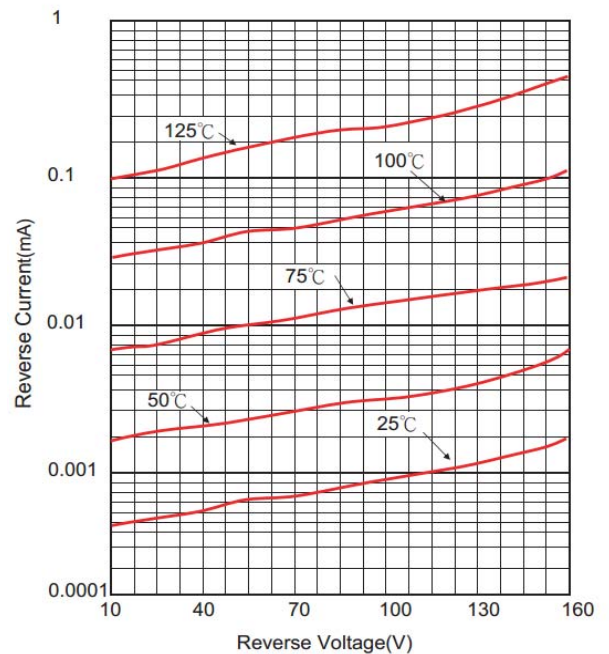

Maximum Non- Repetitive Forward Surge Current

