


RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

SOT-23


FEATURES

- Low forward voltage : $V_{F(3)}=0.92V(\text{typ.})$
- Fast reverse recovery time : $t_{RR}=1.6ns(\text{typ.})$

MARKING: D3



- 1 · Cathode
- 2 · N.C
- 3 · Anode

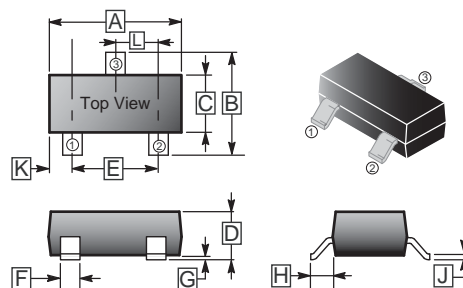

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.70	3.04	G	-	0.18
B	2.10	2.80	H	0.40	0.60
C	1.20	1.60	J	0.08	0.20
D	0.89	1.40	K	0.6 REF.	
E	1.78	2.04	L	0.85	1.15
F	0.30	0.50			

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNIT
Non-Repetitive Peak Reverse Voltage	V_{RM}	85	V
DC Blocking Voltage	V_R	80	V
Forward Continuous Current	I_{FM}	300	mA
Average Rectified Output Current	I_O	100	mA
Power Dissipation	P_D	150	mW
Junction & Storage Temperature	T_J, T_{STG}	125, -55~125	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Reverse Breakdown Voltage	$V_{(BR)R}$	80	-	-	V	$I_R = 100\mu\text{A}$
Forward Voltage	V_{F1}	-	0.61	-	V	$I_F = 1\text{mA}$
	V_{F2}	-	0.74	-	V	$I_F = 10\text{mA}$
	V_{F3}	-	0.92	1.2	V	$I_F = 100\text{mA}$
Reverse Current	I_R	-	-	0.1	μA	$V_R = 30\text{V}$
		-	-	0.5	μA	$V_R = 80\text{V}$
Capacitance Between Terminals	C_T	-	2.2	4.0	pF	$V_R = 0\text{V}, f = 1\text{MHz}$
Reverse Recovery Time	t_{RR}	-	1.6	4.0	nS	$I_F = I_R = 10\text{mA}, I_{rr} = 0.1 \times I_R$

RATINGS AND CHARACTERISTIC CURVES

