





RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free


FEATURES

- Fast switching speed
- For General Purpose Switching Applications
- High Conductance

MARKING

Product	MMBD4448HT	MMBD4448HTA	MMBD4448HTC	MMBD4448HTS
Marking	A3	A6	A7	AB
Circuit				

SOT-523

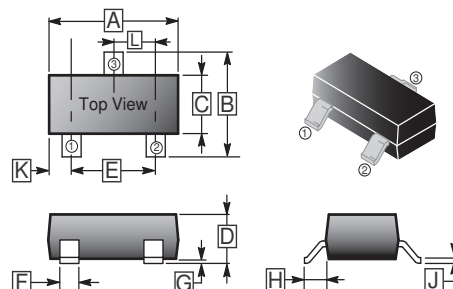

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	1.5	1.7	G	-	0.1
B	1.45	1.75	H	0.55 REF.	
C	0.75	0.85	J	0.1	0.2
D	0.7	0.9	K	-	
E	0.9	1.1	L	0.5 TYP.	
F	0.15	0.25	M	0.25	0.325

PACKAGE INFORMATION

Package	MPQ	Leader Size
SOT-523	3K	7 inch

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameters	Symbol	Rating	Unit
Non-Repetitive Peak Reverse Voltage	V_{RM}	100	V
Peak Repetitive Reverse Voltage	V_{RRM}	80	V
Working Peak Reverse Voltage	V_{RWM}	80	V
DC Blocking Voltage	V_R	80	V
RMS Reverse Voltage	$V_{R(RMS)}$	57	V
Forward Continuous Current	I_{FM}	500	mA
Average Rectified Output Current	I_o	250	mA
Non-Repetitive Peak Forward Surge Current	I_{FSM}	$t=1.0\mu\text{s}$	4.0
		$t=1.0\text{s}$	1.5
Power Dissipation	P_D	150	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	833	$^\circ\text{C} / \text{W}$
Storage Temperature	T_{STG}	-65~150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameters	Symbol	Min.	Max.	Unit	Test Conditions
Reverse Breakdown Voltage	V_R	80	-	V	$I_R=2.5\mu\text{A}$
Forward Voltage	V_{F1}	0.62	0.72	V	$I_F=5\text{mA}$
	V_{F2}	-	0.855	V	$I_F=10\text{mA}$
	V_{F3}	-	1	V	$I_F=100\text{mA}$
	V_{F4}	-	1.25	V	$I_F=150\text{mA}$
Maximum DC Reverse Current at rated DC blocking voltage	I_{R1}	-	0.1	μA	$V_R=70\text{V}$
	I_{R2}	-	25	nA	$V_R=20\text{V}$
Capacitance between terminals	C_T	-	3.5	pF	$V_R=6\text{V}, f=1\text{MHz}$
Maximum Reverse Recovery Time	T_{RR}	-	4	nS	$V_R=6\text{V}, I_F=5\text{mA}$

CHARACTERISTIC CURVES

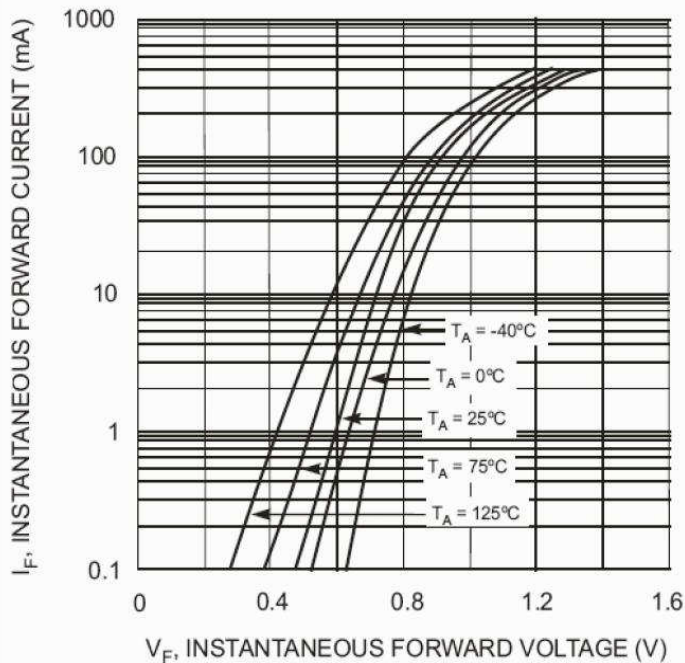


Fig. 1 Typical Forward Characteristics

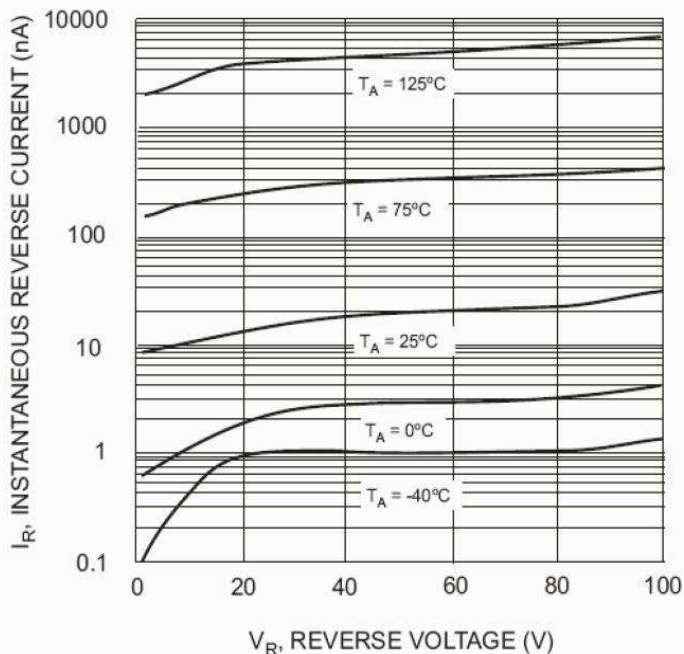


Fig. 2 Typical Reverse Characteristics

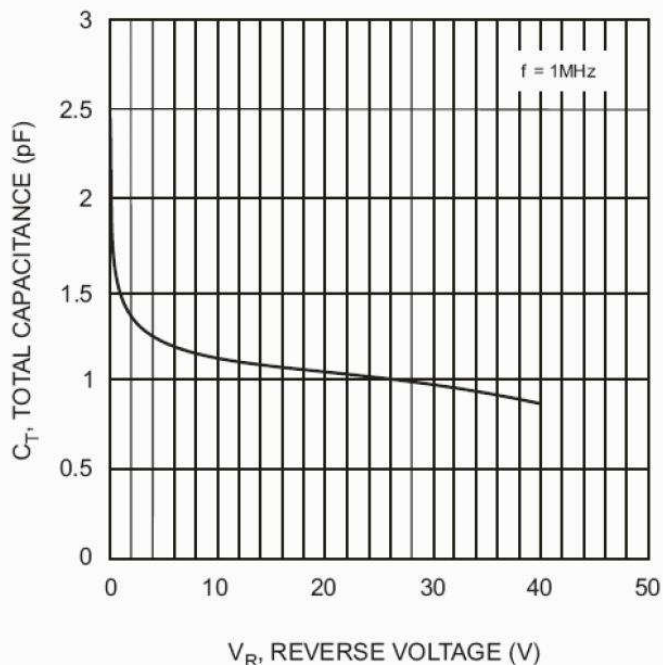


Fig. 3 Typical Capacitance vs. Reverse Voltage

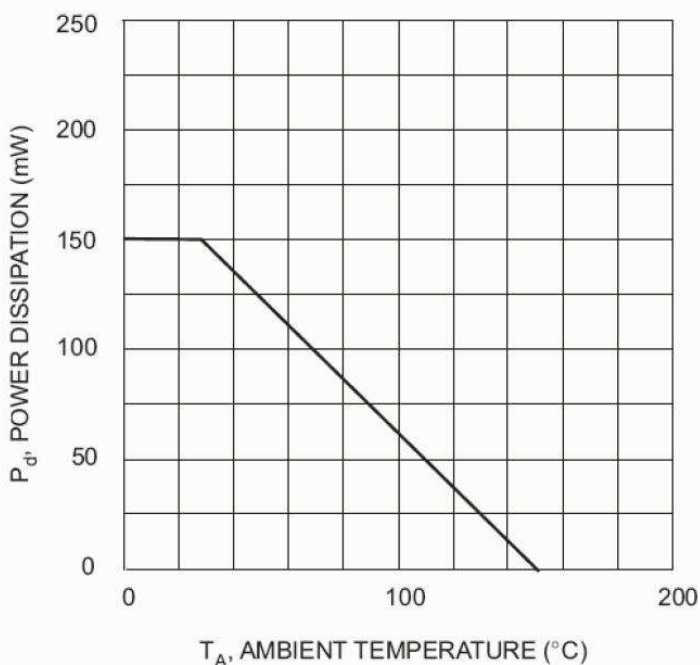


Fig. 4 Power Derating Curve, Total Package