

RoHS Compliant Product

A suffix of "-C" specifies halogen-free and lead-free

## FEATURES

- High Current Capability
- Low Forward Voltage Drop
- Low Reverse Current
- Low Thermal Resistance
- Excellent High Temperature Stability
- Low Power Loss and High Efficiency
- High Forward Surge Capability
- Meet ISO 16750-2 Load Dump Test (Varied by Test Condition)
- Meets MSL level 1, per J-STD-020

## MECHANICAL DATE

- Terminals: Matte tin plated, solderable per MIL-STD-750, Method 2026, J-STD-002 and JESD 22-B102
- Molding Compound Flammability Rating: UL94-0
- HE3 suffix meets JESD 201 class 2 whisker test
- Polarity: Heatsink is anode

## APPLICATION

- High Peak Power
- High-Temperature
- Clamping Diode
- Load Switching and Lighting

## PACKAGE INFORMATION

Package	MPQ	Leader Size
DO-218	0.75K	13 inch


## ORDER INFORMATION

Part Number	Type
SM6MxxT-C Series	Lead (Pb)-free and Halogen-free

## MAXIMUM RATINGS (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Peak Pulse Power Dissipation	P <sub>PPM</sub>	4600	W
		3600	
Power Dissipation on Infinite Heatsink @T <sub>C</sub> =25°C	P <sub>D</sub>	6	W
Peak Forward Surge Current, 8.3ms single half sine-wave	I <sub>FSM</sub>	600	A
Typical Thermal Resistance, Junction-Case	R <sub>θJC</sub>	1	°C/W
Operating Junction & Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55~175	°C

### DO-218

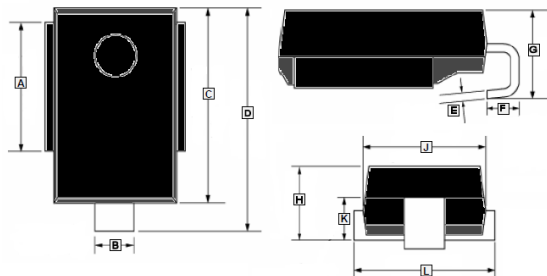

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	8.7	9.3	G	4.7	5.7
B	2.3	3	H	4.7	5.25
C	13.2	13.8	J	8.2	8.8
D	15	16	K	2.65	3.55
E	0.45	0.9	L	9.5	10.5
F	1.5	2.7			



**ELECTRICAL CHARACTERISTICS** (T<sub>A</sub>=25°C unless otherwise noted)

Part Number	Breakdown Voltage V <sub>BR</sub> (V)		Test Current I <sub>T</sub> (mA)	Stand-off Voltage V <sub>RWM</sub> (V)	Maximum Reverse Leakage @ V <sub>RWM</sub> I <sub>D</sub> (µA)	Maximum Leakage @ V <sub>RWM</sub> T <sub>J</sub> =175°C I <sub>D</sub> (µA)	Maximum Peak Pulse Current @10/1000µs Waveform (A)	Maximum Clamping Voltage @ I <sub>PP</sub> V <sub>C</sub> (V)
	Min.	Max.						
SM6M10T-C	11.1	13.6	5	10	15	250	245	18.8
SM6M10AT-C		12.3	5	10	15	250	271	17
SM6M11T-C	12.2	14.9	5	11	10	150	229	20.1
SM6M11AT-C		13.5	5	11	10	150	253	18.2
SM6M12T-C	13.3	16.3	5	12	10	150	209	22
SM6M12AT-C		14.7	5	12	10	150	231	19.9
SM6M13T-C	14.4	17.6	5	13	10	150	193	23.8
SM6M13AT-C		15.9	5	13	10	150	214	21.5
SM6M14T-C	15.6	19.1	5	14	10	150	178	25.8
SM6M14AT-C		17.2	5	14	10	150	198	23.2
SM6M15T-C	16.7	20.4	5	15	10	150	171	26.9
SM6M15AT-C		18.5	5	15	10	150	189	24.4
SM6M16T-C	17.8	21.8	5	16	10	150	160	28.8
SM6M16AT-C		19.7	5	16	10	150	177	26
SM6M17T-C	18.9	23.1	5	17	10	150	151	30.5
SM6M17AT-C		20.9	5	17	10	150	167	27.6
SM6M18T-C	20	24.4	5	18	10	150	143	32.2
SM6M18AT-C		22.1	5	18	10	150	158	29.2
SM6M20T-C	22.2	27.1	5	20	10	150	128	35.8
SM6M20AT-C		24.5	5	20	10	150	142	32.4
SM6M22T-C	24.4	29.8	5	22	10	150	117	39.4
SM6M22AT-C		26.9	5	22	10	150	130	35.5
SM6M24T-C	26.7	32.6	5	24	10	150	107	43
SM6M24AT-C		29.5	5	24	10	150	118	38.9
SM6M26T-C	28.9	35.3	5	26	10	150	99	46.6
SM6M26AT-C		31.9	5	26	10	150	109	42.1
SM6M27T-C	24	30	10	22	0.5	20	65	40
SM6M28T-C	31.1	38	5	28	10	150	92	50.1
SM6M28AT-C		34.4	5	28	10	150	101	45.4
SM6M30T-C	33.3	40.7	5	30	10	150	86	53.5
SM6M30AT-C		36.8	5	30	10	150	95	48.4
SM6M33T-C	36.7	44.9	5	33	10	150	78	59.0
SM6M33AT-C		40.6	5	33	10	150	86	53.3
SM6M36T-C	40	48.9	5	36	10	150	72	64.3
SM6M36AT-C		44.2	5	36	10	150	79	58.1

Note:

- For all types maximum V<sub>F</sub>=1.8V at I<sub>F</sub>=100A measured on 8.3ms single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum.

**RATINGS AND CHARACTERISTIC CURVE**

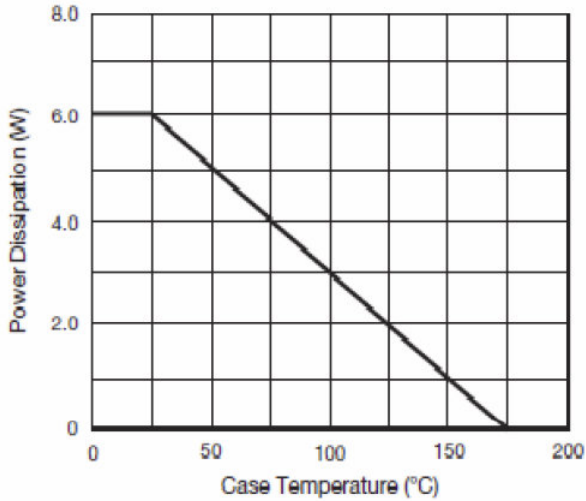


Fig. 1 - Power Derating Curve

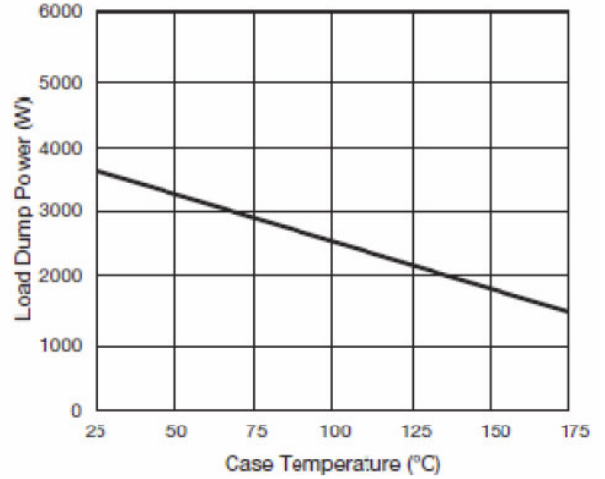


Fig. 2 - Load Dump Power Characteristics (10 ms Exponential Waveform)

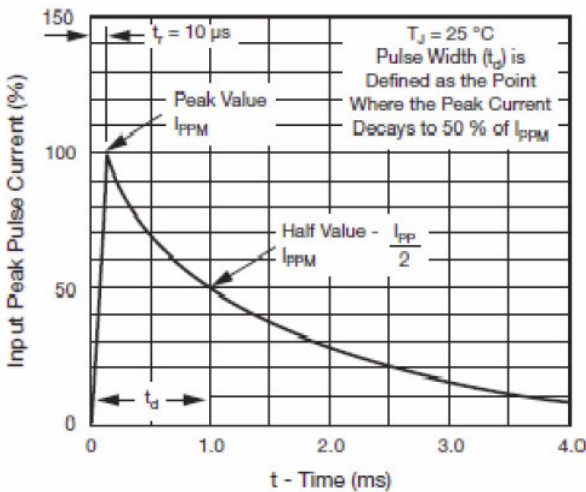


Fig. 3 - Pulse Waveform

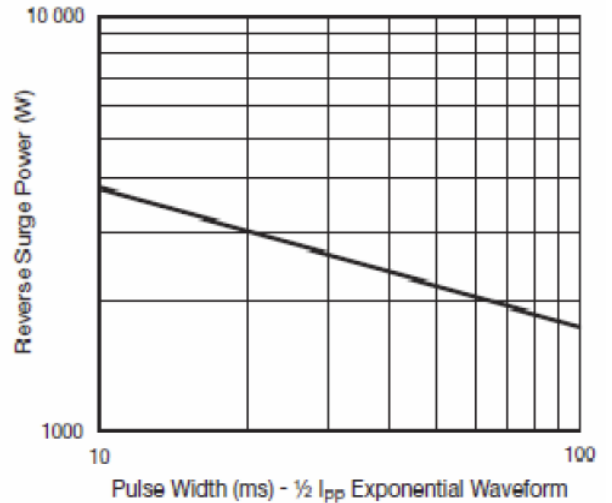


Fig. 4 - Reverse Power Capability

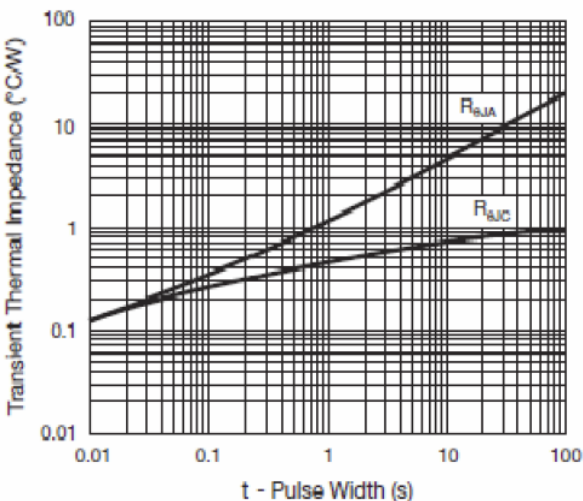


Fig. 5 - Typical Transient Thermal Impedance

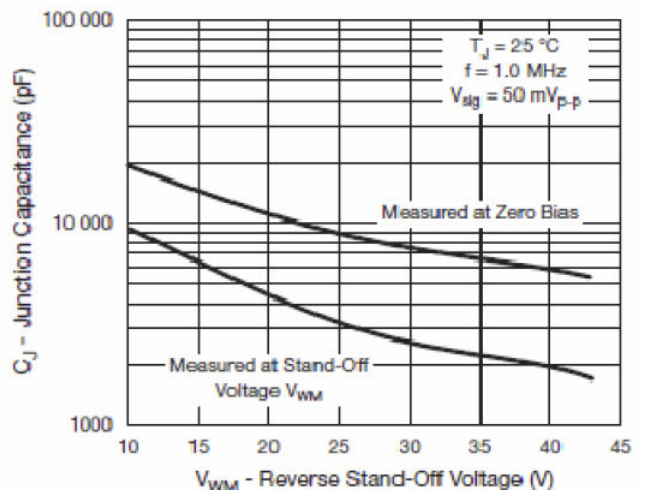


Fig. 6 - Typical Junction Capacitance