


RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES


- High Speed Switching
- Small Surface Mounting Type
- Green EMC
- Matte Tin(Sn) Lead Finish
- Band Indicates Cathode

SOD-882



PACKAGE INFORMATION

| Package | MPQ | Leader Size |
|---------|-----|-------------|
| SOD-882 | 10K | 7 inch |

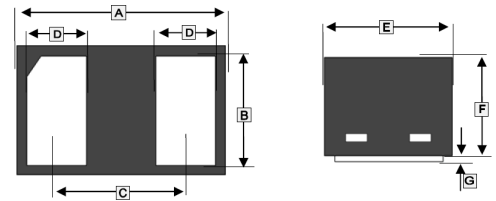

ORDER INFORMATION

| Part Number | Type |
|---------------|---------------------------------|
| MM8Z Series-C | Lead (Pb)-free and Halogen-free |

| REF. | Millimeter | | REF. | Millimeter | |
|------|------------|------|------|------------|------|
| | Min. | Max. | | Min. | Max. |
| A | 0.95 | 1.05 | E | 0.55 | 0.65 |
| B | 0.45 | 0.55 | F | 0.46 | 0.50 |
| C | 0.65 TYP | | G | - | 0.03 |
| D | 0.20 | 0.30 | | | |

Cathode  Anode 

ABSOLUTE MAXIMUM RATINGS (T_A=25°C unless otherwise specified)

| Parameter | Symbol | Ratings | Unit |
|---|-----------------------------------|--------------|------|
| Power Dissipation | P _D | 200 | mW |
| Forward Voltage @I _F =10mA | V _F | 1 | V |
| Operating and Storage Temperature Range | T _J , T _{STG} | 150, -55~150 | °C |

ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise specified)

| Part Number | Marking | Zener Voltage Range ¹ | | | | Maximum Zener Impedance ² | | | Maximum Reverse Current | |
|-------------|---------|----------------------------------|------|------|-----------------|--------------------------------------|----------------------------------|------|--------------------------------|-----|
| | | V _Z @I _{ZT} | | | I _{ZT} | Z _{ZT} @I _{ZT} | Z _{ZK} @I _{ZK} | | I _R @V _R | |
| | | Min. | Nom. | Max. | | | mA | Ω | mA | Ω |
| | | V | V | V | mA | Ω | mA | Ω | μA | V |
| MM8Z2V0C-C | 8± | 1.9 | 2 | 2.1 | 5 | 100 | 1 | 564 | 120 | 0.5 |
| MM8Z2V2C-C | 8⊥ | 2.09 | 2.2 | 2.31 | 5 | 100 | 1 | 564 | 120 | 0.7 |
| MM8Z2V4C-C | 80 | 2.2 | 2.4 | 2.6 | 5 | 100 | 1 | 1000 | 50 | 1 |
| MM8Z2V7C-C | 81 | 2.5 | 2.7 | 2.9 | 5 | 100 | 1 | 1000 | 20 | 1 |
| MM8Z3V0C-C | 82 | 2.8 | 3 | 3.2 | 5 | 100 | 1 | 1000 | 10 | 1 |
| MM8Z3V3C-C | 83 | 3.1 | 3.3 | 3.5 | 5 | 95 | 1 | 1000 | 5 | 1 |
| MM8Z3V6C-C | 84 | 3.4 | 3.6 | 3.8 | 5 | 90 | 1 | 1000 | 5 | 1 |
| MM8Z3V9C-C | 85 | 3.7 | 3.9 | 4.1 | 5 | 90 | 1 | 1000 | 3 | 1 |
| MM8Z4V3C-C | 86 | 4 | 4.3 | 4.6 | 5 | 90 | 1 | 1000 | 3 | 1 |
| MM8Z4V7C-C | 87 | 4.4 | 4.7 | 5 | 5 | 80 | 1 | 800 | 3 | 2 |

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise specified)

| Part Number | Marking | Zener Voltage Range ¹ | | | | Maximum Zener Impedance ² | | | Maximum Reverse Current | |
|-------------|---------|----------------------------------|------|------|----------|--------------------------------------|-------------------|---------------|-------------------------|------|
| | | $V_Z @ I_{ZT}$ | | | I_{ZT} | $Z_{ZT} @ I_{ZT}$ | $Z_{ZK} @ I_{ZK}$ | $I_R @ V_R$ | | |
| | | Min. | Nom. | Max. | | | | μA | V | |
| | | V | V | V | mA | Ω | mA | Ω | μA | V |
| MM8Z5V1C-C | 88 | 4.8 | 5.1 | 5.4 | 5 | 60 | 1 | 500 | 2 | 2 |
| MM8Z5V6C-C | 89 | 5.2 | 5.6 | 6 | 5 | 40 | 1 | 200 | 1 | 2 |
| MM8Z6V2C-C | 8A | 5.8 | 6.2 | 6.6 | 5 | 10 | 1 | 100 | 3 | 4 |
| MM8Z6V8C-C | 8B | 6.4 | 6.8 | 7.2 | 5 | 15 | 1 | 160 | 2 | 4 |
| MM8Z7V5C-C | 8C | 7 | 7.5 | 7.9 | 5 | 15 | 1 | 160 | 1 | 5 |
| MM8Z8V2C-C | 8D | 7.7 | 8.2 | 8.7 | 5 | 15 | 1 | 160 | 0.7 | 5 |
| MM8Z9V1C-C | 8E | 8.5 | 9.1 | 9.6 | 5 | 15 | 1 | 160 | 0.2 | 7 |
| MM8Z10VC-C | 8F | 9.4 | 10 | 10.6 | 5 | 20 | 1 | 160 | 0.1 | 8 |
| MM8Z11VC-C | 8G | 10.4 | 11 | 11.6 | 5 | 20 | 1 | 160 | 0.1 | 8 |
| MM8Z12VC-C | 8H | 11.4 | 12 | 12.7 | 5 | 25 | 1 | 80 | 0.1 | 8 |
| MM8Z13VC-C | 8J | 12.4 | 13 | 14.1 | 5 | 30 | 1 | 80 | 0.1 | 8 |
| MM8Z15VC-C | 8K | 14.3 | 15 | 15.8 | 5 | 30 | 1 | 80 | 0.05 | 10.5 |
| MM8Z16VC-C | 8L | 15.3 | 16 | 17.1 | 5 | 40 | 1 | 80 | 0.05 | 11.2 |
| MM8Z18VC-C | 8M | 16.8 | 18 | 19.1 | 5 | 45 | 1 | 80 | 0.05 | 12.6 |
| MM8Z20VC-C | 8N | 18.8 | 20 | 21.2 | 5 | 55 | 1 | 100 | 0.05 | 14 |
| MM8Z22VC-C | 8P | 20.8 | 22 | 23.3 | 5 | 55 | 1 | 100 | 0.05 | 15.4 |
| MM8Z24VC-C | 8R | 22.8 | 24 | 25.6 | 5 | 70 | 1 | 120 | 0.05 | 16.8 |
| MM8Z27VC-C | 8S | 25.1 | 27 | 28.9 | 2 | 80 | 0.5 | 300 | 0.05 | 18.9 |
| MM8Z30VC-C | 8T | 28 | 30 | 32 | 2 | 80 | 0.5 | 300 | 0.05 | 21 |
| MM8Z33VC-C | 8U | 31 | 33 | 35 | 2 | 80 | 0.5 | 500 | 0.05 | 23.2 |
| MM8Z36VC-C | 8V | 34 | 36 | 38 | 2 | 90 | 0.5 | 500 | 0.05 | 25.2 |
| MM8Z39VC-C | 8X | 37 | 39 | 41 | 2 | 130 | 0.5 | 500 | 0.05 | 27.3 |
| MM8Z43VC-C | 8Y | 40 | 43 | 46 | 2 | 150 | 0.5 | 500 | 0.05 | 30.1 |
| MM8Z47VC-C | 8Z | 44 | 47 | 50 | 2 | 170 | 0.5 | 500 | 0.05 | 32.9 |
| MM8Z51VC-C | 8- | 48 | 51 | 54 | 2 | 180 | 0.5 | 500 | 0.05 | 35.7 |
| MM8Z56VC-C | 8= | 52 | 56 | 60 | 2 | 200 | 0.5 | 500 | 0.05 | 39.2 |
| MM8Z62VC-C | 8≡ | 58 | 62 | 66 | 2 | 215 | 0.5 | 500 | 0.05 | 43.4 |
| MM8Z68VC-C | 8> | 64 | 68 | 72 | 2 | 240 | 0.5 | 500 | 0.05 | 47.6 |
| MM8Z75VC-C | 8< | 70 | 75 | 79 | 2 | 255 | 0.5 | 500 | 0.05 | 52.5 |

Notes:

1. The Zener Voltage (V_Z) is tested under pulse condition of 10mS.
2. The Zener impedance is derived from the 60-cycle ac voltage, which results when an AC current having an Rms value equal to 10% of the dc Zener current (I_{ZT} or I_{ZK}) is superimposed to I_{ZT} or I_{ZK} .

RATING AND CHARACTERISTIC CURVES

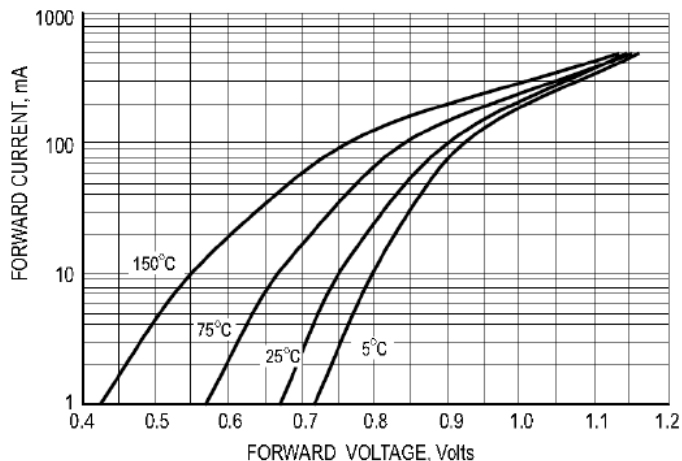


Fig.1 TYPICAL FORWARD VOLTAGE

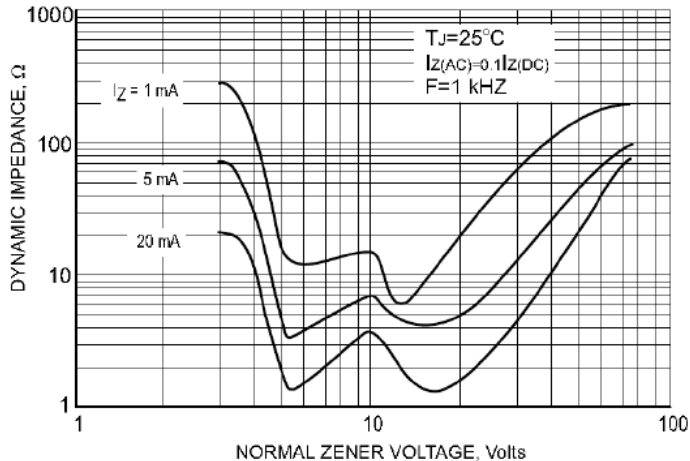


Fig.2 EFFECT OF ZENER VOLTAGE ON ZENER IMPEDANCE

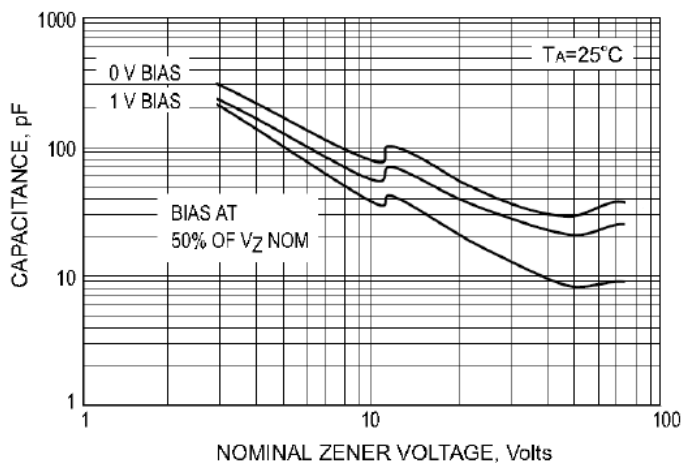


Fig.3 TYPICAL CAPACITANCE

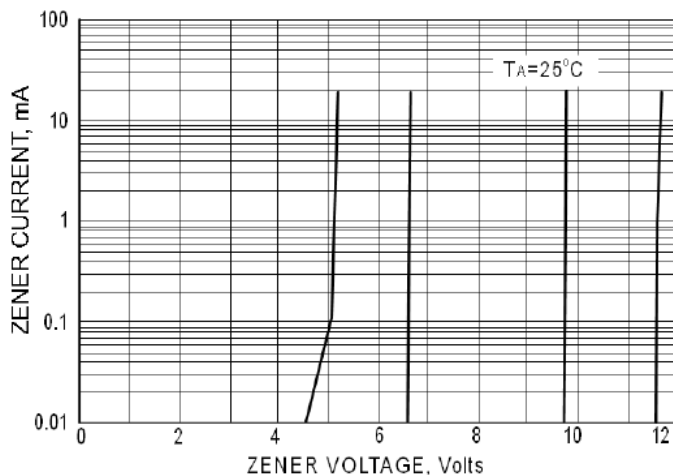


Fig.4 ZENER BREAKDOWN CHARACTERISTICS

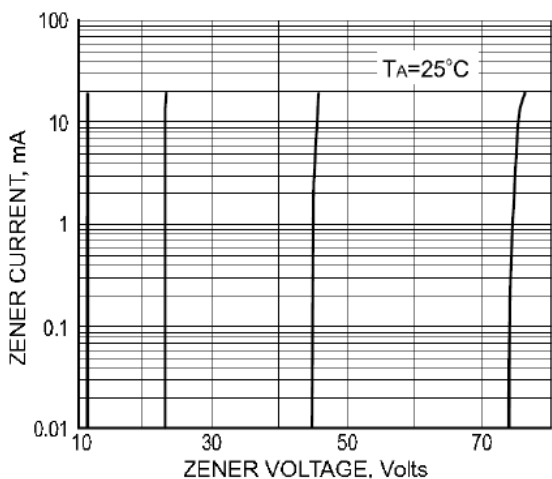


Fig.5 ZENER BREAKDOWN CHARACTERISTICS

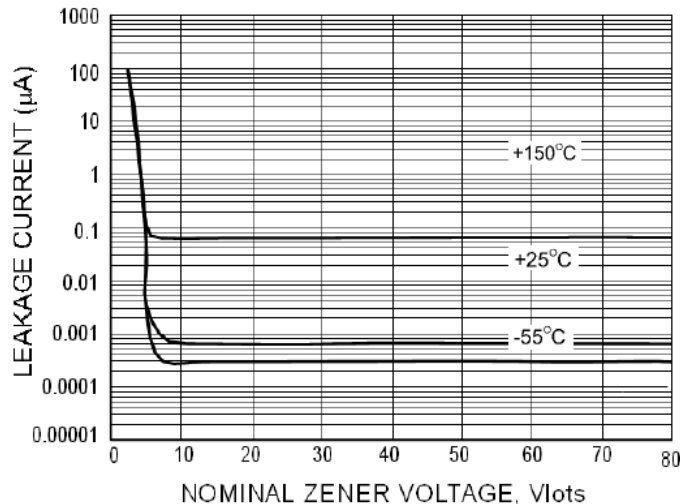


Fig.6 TYPICAL LEAKAGE CURRENT