


RoHS Compliant Product
A suffix of "-C" specifies halogen free

FEATURES


- Trench Barrier Schottky technology
- Low forward voltage drop
- Low reverse current
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.98 g (Approximate)

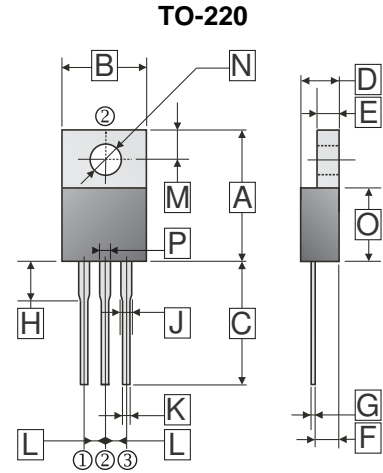

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	14.22	16.51	J	0.7	1.78
B	9.65	10.67	K	0.38	1.02
C	12.50	14.75	L	2.39	2.69
D	3.56	4.90	M	2.50	3.43
E	0.51	1.45	N	3.10	4.09
F	2.03	2.92	O	8.38	9.65
G	0.31	0.76	P	0.89	1.45
H	3.5	4.5			



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)

Parameter	Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	80	V
Working Peak Reverse Voltage	V_{RSM}	80	V
Maximum DC Blocking Voltage	V_{DC}	80	V
Maximum Average Forward Rectified Current	I_F	10	A
(Per Leg)		20	
(Per Device)			
Peak Forward Surge Current, 8.3 ms single half sine-wave	I_{FSM}	150	A
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V / μ s
Typical Thermal Resistance	$R_{\theta JC}$	4	$^{\circ}C/W$
Operating and Storage Temperature Range	T_J, T_{STG}	-40~150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS


Parameter	Symbol	Typ.	Max.	Unit	Test Condition
Maximum Instantaneous Forward Voltage	V_F	0.45	0.48	V	$I_F = 3A, T_J = 25^{\circ}C$
		0.49	0.55		$I_F = 5A, T_J = 25^{\circ}C$
		0.60	0.65		$I_F = 10A, T_J = 25^{\circ}C$
		0.56	-		$I_F = 10A, T_J = 100^{\circ}C$
Maximum DC Reverse Current at Rated DC Blocking Voltage ²	I_R	-	0.2	mA	$T_J = 25^{\circ}C$
		-	20		$T_J = 100^{\circ}C$
Typical Junction Capacitance ¹	C_J	750	-	pF	

NOTES:


1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Pulse Test : Pulse Width = 300 μ s, Duty Cycle \leq 2.0%.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

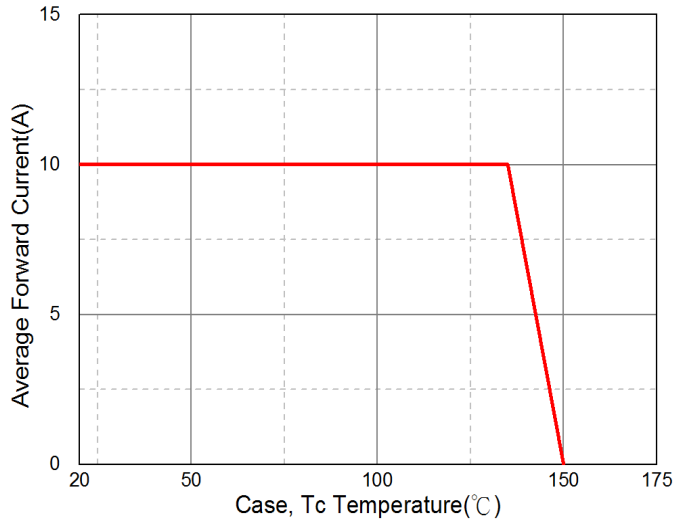


Typical Forward Characteristic

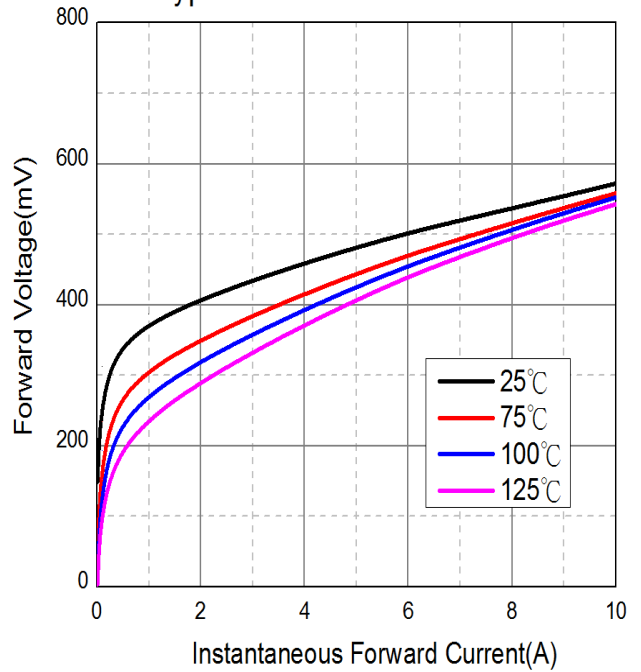

Typical Junction Capacitance

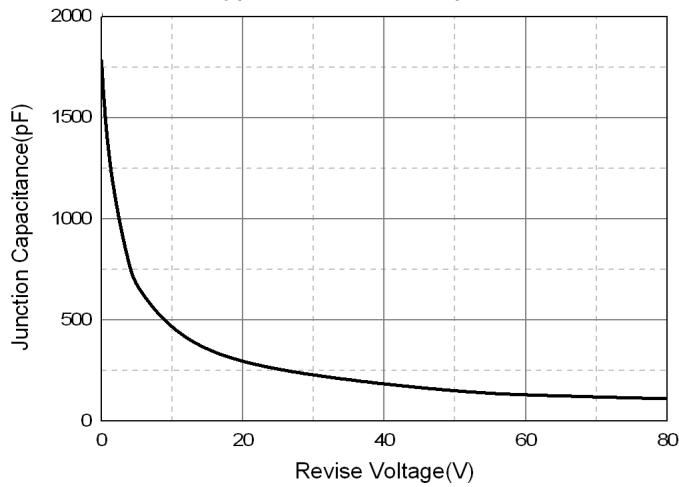

Typical Reverse Characteristic

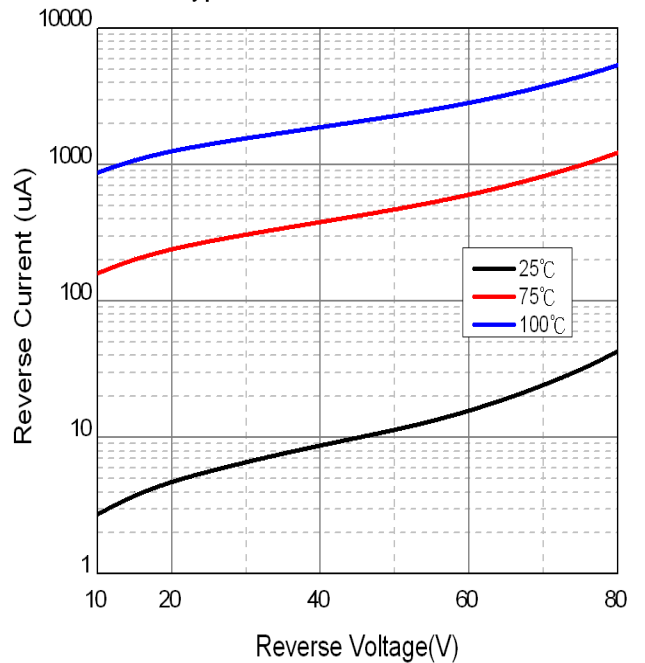

Maximum Non-Repetitive Forward Surge Current

